


Verbatim LED PAR16 GU10 7W 4000K 370lm

4000K Neutral White 370 LM DIM

- GU10 Socket
- 220 - 240V
- 30,000 hours Lifetime
- Dimmable
- 87% Energy Saving
- Equivalent to 53W incandescent bulb

Product Number	52302
General Data	
Lamp Socket	GU10
Electric Data	
Wattage (W)	7
Wattage Equivalent (W)	53
Voltage (V)	220 - 240 V
Dimmable	yes
Power Factor	0.7
Operating Frequency (Hz)	50-60
Geometric Data	
Length (mm)	60
Diameter (mm)	50
Weight (g)	65
Photometric Data	
Luminous Flux 90° Cone (lm)	370
CRI	80
CCT (K)	4000
Luminous Intensity (cd)	690
Beam Angle (°)	36
Luminous Efficacy (lm/W)	53
Lifetime (hrs)	30,000
Switching Cycle	20,000

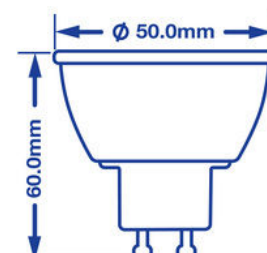


24/02/2015

24/02/2015

Photometric Diagrams


24/02/2015

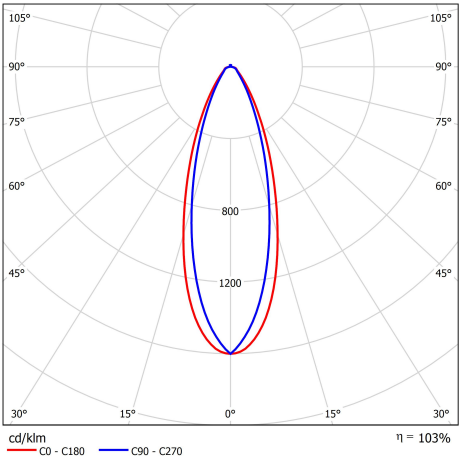


0.5	0.28 0.33	E(0°) E(C90) E(C0)	2730 1225 1169
1.0	0.56 0.67	E(0°) E(C90) E(C0)	683 306 292
1.5	0.84 1.00	E(0°) E(C90) E(C0)	303 136 130
2.0	1.12 1.34	E(0°) E(C90) E(C0)	171 77 73
2.5	1.40 1.67	E(0°) E(C90) E(C0)	109 49 47
3.0	1.68 2.01	E(0°) E(C90) E(C0)	76 34 32

Afstand [m] Kegeldiameter [m] Verlichtingssterkte [lx]

— C0 - C180 (Halveringshoek: 37.0°)
— C90 - C270 (Halveringshoek: 31.2°)

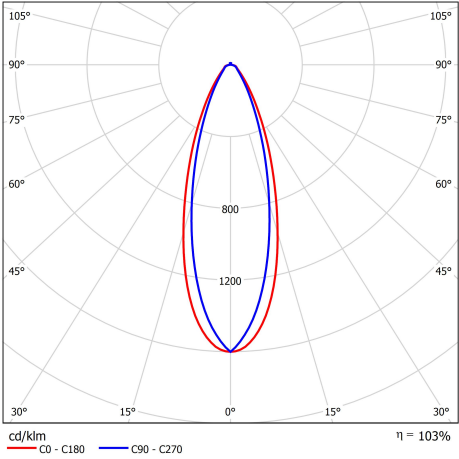


24/02/2015

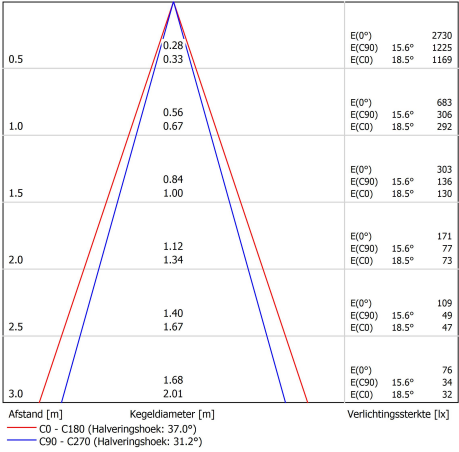

24/02/2015

Energy Rating

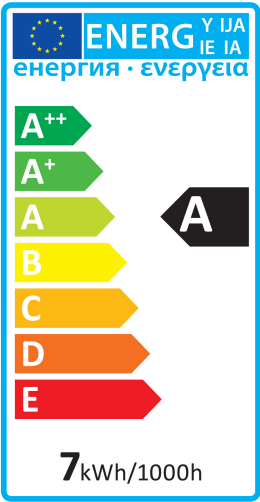

Technical Packaging Details

Barcode	023942523024
EAN 128	(02)00023942523024(37)10(91)204
EAN 14	50023942523029
Pack Dimensions(HxWxL)	H85 x W53 x L53 (mm)
MOQ	10
Carton Dimensions (HxWxL)	H98 x W120 x L280 (mm)
Cartons/Pallet	192
Layers/Pallet	8
Units/Pallet	1920

24/02/2015